



Features

- > Low noise centrifugal fan
- > Advanced ABS Louvre hood design for Increased Airflow
- > Very minimal depth-usage of the enclosure
- > The easy mounting system allows locking the fan from outside or inside of the enclosure
- > Easy accessibility allows fast filter mat replacement
- > Permanent sealing gasket with Polyurethane Foam

Civaux **CRF series roof ventilators** are designed with **Low Noise Centrifugal Fans** which deliver a high-pressure air- throughput, when coupled with an appropriate inlet filter installed on the bottom of the enclosure. This high-pressure performance helps overcome the resistance of airflow within a densely configured enclosure.

The roof ventilator system can be used when the space in the cabinet is insufficient to install the side-mounted fan can consider a CRF series roof ventilator.

The roof ventilators are an effective alternative to conventional fan filters. A roof unit which takes no internal space and will very effectively dissipate the warm air from the top of the unit.

Technical Data

Model	CRF 40D	
Rated Voltage	230V 50/60Hz	115V 50/60Hz
RAL 7032	CRF40D.G240	CRF40D.G115
RAL 7035	CRF40D.W240	CRF40D.W115
Air flow, free blowing No filter mat IP22 (m ³ /h)	1200/1340 m ³ /h	
Air flow, free blowing filter mat IP55 (m ³ /h)	870/960 m ³ /h	
Axial Fan	Electric Capacitance	
Rated current (A)	0.60/0.74	
Power (W)	131/170	
Noise level (dB)	71	
Operating Temperature range	-40°C to 70°C	
Exit Filter	CPF32.EX.G / CPF32.EX.W	

Available colors



RAL7035




RAL7032

CRF40D Series

Premium Range - Top Vent Fan & Filter upto 1300 m³/h

Dimensions

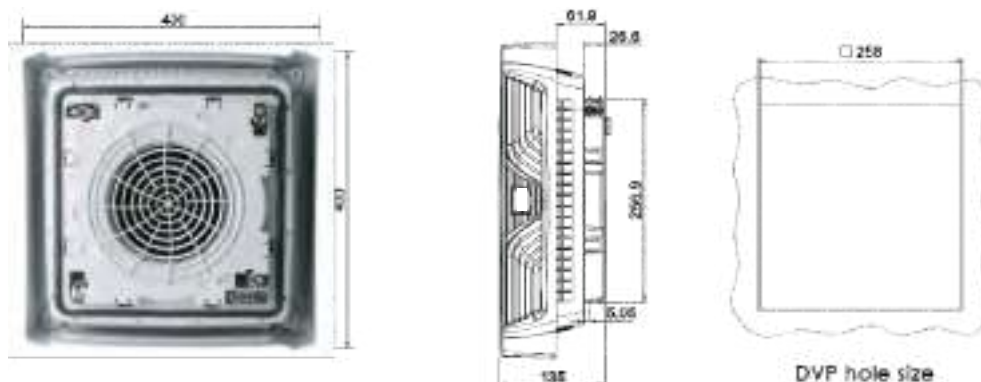

Air Throughput

